




CRATE RACIN' USA

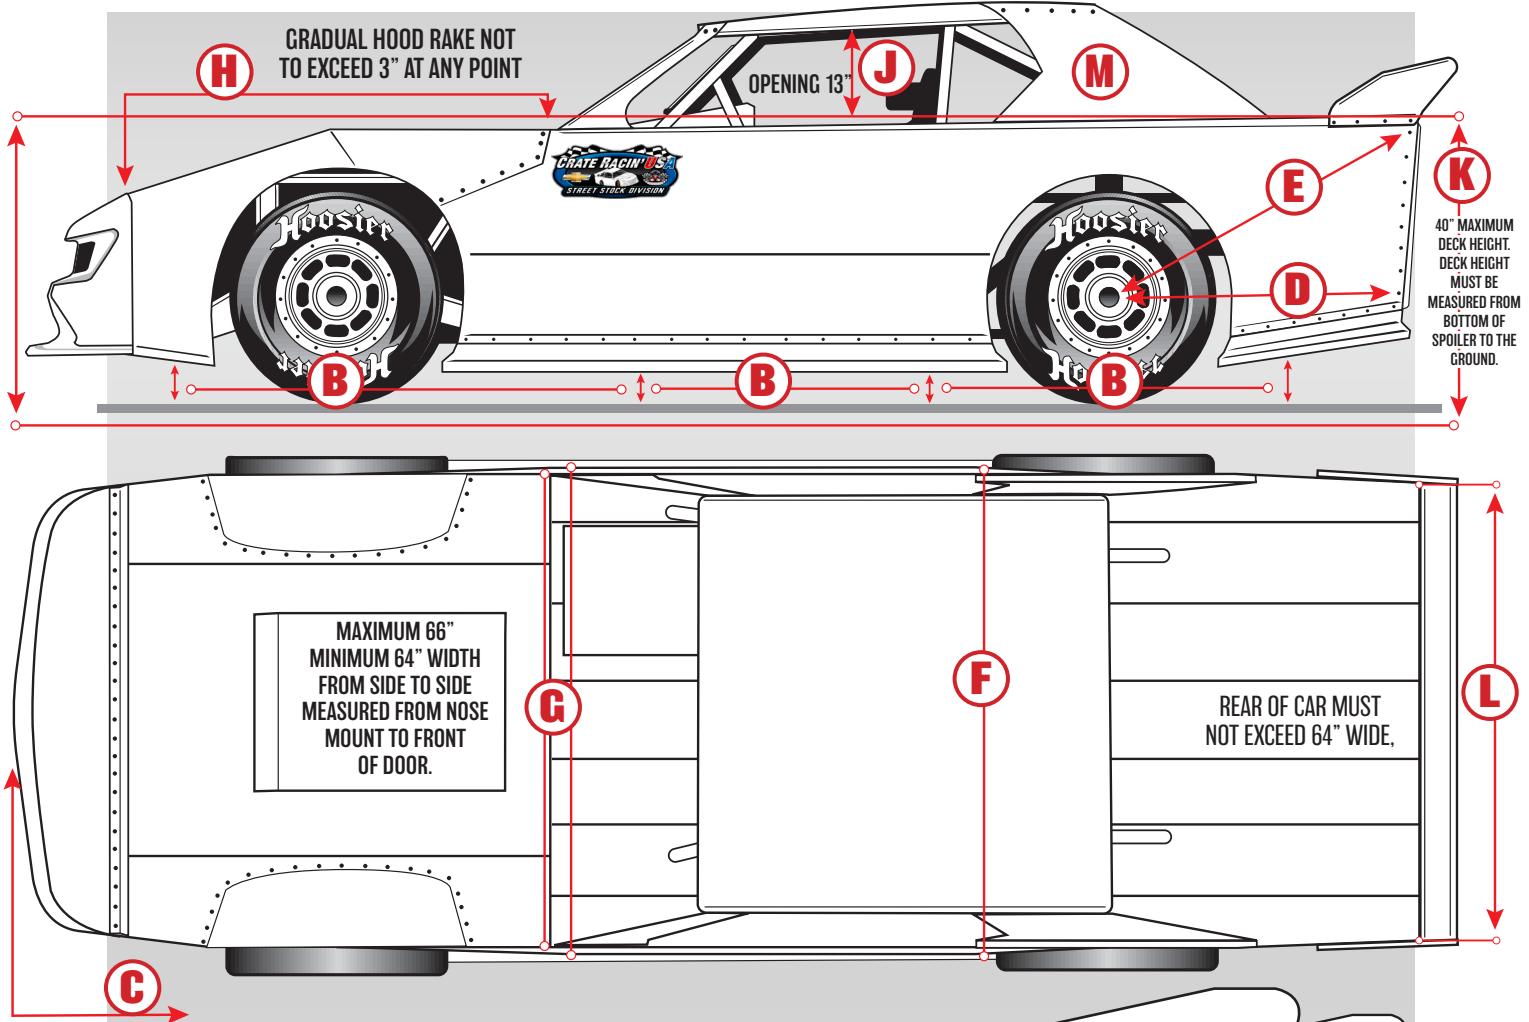

2026 STREET STOCK DIMENSIONS

A) The interior (deck) is permitted to be dropped to the middle (just behind the seat) a maximum of 5 inches below the top of the doors.

B) Body must be minimum height of 5" off the ground at all points around car.

C) Maximum distance of 45" from furthest point on front of nose to front cross member (Measured from where lower control arm bolt goes through cross-member to farthest point of nose).

D) Rear Quarter Panels - 48" maximum measured from center of axle straightline to rear of car.

E) Rear Quarter Panels - 51" maximum measured from center of axle to top of quarter panel/bottom of spoiler.

F) Body must not be any wider (from side to side) than 68", measured at driver's compartment, 76 inches at bottom of doors (Measured in front of rear tires).

G) Maximum 66" minimum 64" width from side to side measured from nose mount to front of door.

H) Gradual nose rake - 3" maximum.

I) 60" maximum width of rear spoiler, must be same height and angle.

J) 13" minimum window opening.

K) 40" maximum Deck Height. Deck height must be measured from bottom of spoiler to the ground.

L) Rear of car must not exceed 64" width

M) Sail Panels must be same (open or closed) on both sides and can not mount any further inward than 2" of door/Quarter.

